Fig. 1




Fig. 2




Fig. 3





Fig. 4



4/11

Fig. 5

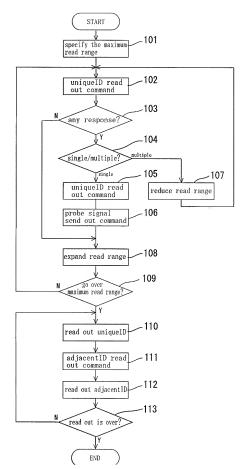


Fig. 6






FIG. 7



nterro	ator		I		ags	
	moiquelD readout command(1-8)	3	ľ	6 :	2 !	s I
			->	>		L
f	J.,			_	-	Γ
responses			1			
,	uniquelly readout command(1-4)					
	30(1-4)	_	_	L		
	<u> </u>	-	-			1
responses						
	smiqueID resdout command(1-2)					
	(andon't committed (1-2)					
	(1)		-	\Rightarrow		-
multiple (-0)					
1 ashouses f	uniquely resdect command(1-1)					
	(1)	-	-	_	_	L
read out						-
(1)	probe sizual read out ownered(II)					
	UniqueID readout communi(2 2)		33	-	-	L
		W	(D)	-	_	L
	(2)	-				
read out	Strole store					1
(2)	probe signal send out oversand(2)	L	1			1
	uniquelD readout command(3-4)			\rightarrow	(2) 3	┡
read out	(3)		├	- (Z)	(2) -	<u> </u>
(3)	price circa tend out measuri(2)					1
(3)	Valouela was					
	uniqueID readout command(5-8)	(3)	١.			\vdash
	(0)		ightharpoonup		\Rightarrow	Ь
mulainte f	(6)				Г	
tespenses	oniqueID readout command(5-0)					1
	continues readout comund(5-0)	1				
	(6)	П	;		\Rightarrow	-
	(5)	_	_			
responses	WaitquelD readout command(5-5)					ı
	readout command(5-5)	L				1
					->	⊢
	(1)	-	_			
read out	probe rights read out commend(5)					
(5)	unique In west		L			l
	uniqueID readout command(6-6)				45	(5)
	(1)	$\overline{}$			-15	(2)
read out						
(6)	prote signal read out commend(6)					
	uniquelly readout command(7-8)		16	1	-	<u>_</u>
		Ī	16;	(6)	-	L
	17)	Н		\vdash		Г
read out						
(7)	probe signed and our commed(7)					
	adjacentiD readout command(1)		┝	-		L
read out	(3). (0)	-	-		_	40
(3), (6)	adjacent1b readout command(2)					
				-	-	L
	151.(4)					
read out	adjacentID resduct communo(3)					
(3). (0)	(1)					
read out						-
(1)	AdjacentiB rescort command(5)	1				1
		-	-	\vdash	L.	L
	(1),(1)	1	-	_		1
read out			l			
(2), (7)	adjacentity readout command(6)					1
			-	Н		L
read out	(11,17)				1	
(1),(2)	adjacent[B resdout command(7)					1
	sumsad(1)	-	_		L	
			لـــا	H	=	P
	(5)					1
read out (5)						
1.0						1

Fig.9




9/11

Fig. 10

	FIG. I	U				
interrog	gator		1		ags	
	writinelb residuet commend(1-8)	1		i	ĺ	ì
		=	\Rightarrow		=	-
multiple	The Part of the Pa	=		_		
rasponses	Uniquela					
	unique18 (codes) commod(1-4)	١_,		١.		
multiple responses		-	_	~		
responses	-					
	uniquelB rendout command(1-2)	L				
			-	-		⊢
nultiple responses	Referred	l				
	uniquelly readout command (1-1)	_				
read out	(1)	_				_
(1)	broke stanki send out commed(i)					
	UniqueID readout communi(2-2)	(1)	(i)3	-	-	-
				-	-	-
read out	(2)					
(2)	probe signal and out commed(2)	L	L			
	mique(D readout command(3-4)			Ľ,	(2) 3	-
read out						_
(3)	probe signal and cot expand(3)	_	L			
	uniqueID readout command(5-8)	(3)2				
			=		\Rightarrow	-
responses	9					
	Springe 10 readout command (5-6)					
	10	-			-	_
multiple [- N					
Tesponses [uniqueID readout cotmand(5-5)					
				\vdash	\Rightarrow	_
read out	(5)					
(5)	probe signal send out compand(f)					
	uniqueID readout command(6-6)		$\overline{}$	_	2/5	(5)2
read out	(6)		7	_	-12	(5)-
(6)	probe signal send out stemand(6)					
	ZuiquelD resident command(7-8)	-	£ (6)	<u> </u>	_	
		_	(6)	├	_	~
	in	-	-	_		
read out (7)	prote signal said out commend();					
***	adjacent[D readout command(1)	-	-	L_		L
	(3), (6)	\rightarrow	-	<u> </u>		40
read out (3), (6)	ad income to					
(2). (0)	adincentify readout command(2)	_		L.		
	(1)	_	\vdash			
road out (5)	adjacentHi rendout command(3)					
	(1)	_	_	_		
read out	adjacentID readout command(5)					
	totalend(S)	_	-	_	_	
	02.60	-	М	_		
read out (2),(7)	adjacentID readout command(6)	١.				
		\vdash	_	_		
read out	(1)]	
(1)	adjacent[B readout ecomand(7)		L			
1						
read out						
(5)						

Fig. 11



11/11 Fig. 12

	Fig. I	2	т.	٠.		
interro	gator	3	1 I		ags	s
	uniquelly readout command(1-8)	L .	1	ĺ		
	1	M		1	\Rightarrow	-
multiple responses	150,70	II		_		
reapphases	"filosoft and					
	uniquelb readout command(1-4)					
				*	-	-
multiple responses	21					
	miqueIb readout command(t-2)	ļ	1			
	0)	1	-		L.	L
multiple t	0)	_				_
responses	uniqueID readout command(1-1)		1			
	(1-1)	_				
	117					-
tvad out (1)	probe signal send out transmit(s)	ı	1			
(**	UniqueID readout command(2-2)	-	-	_	L	L
	(30000160(2-2)	-	(1)	//	->	
	(2)	-	_	_		
read out						
(2)	prote signal send our removed(s)	L				
	uniquelD readout command(3-4)	4	-		-	├-
	(3)	1	(2)	L		
read out				_		_
(3)	probe signal send out comment(3)	L				
	uniquelD readout command(5-8)	(3)		Ħ	-	┝
		П	\Rightarrow	2	-	١,
	(9)	H	=	_	Г	Г.
multiple résponsés						
	uniqueIB readout command(5-6)					
	16	П	-		⋈	<u>_</u>
		_				
responses (Stignato					
	EmiqueID readout command(\$-5)	_				
				П	-	-
	(3)					
read out (5)	probe signal send out comment(5)					
(3)	uniquelD readout command(6-6)	-	-	_	L	L
	1 committee (6-6)	_	4-	-	(5)	
zead out	(6)	_				_
(6)	probe signal cond out remand(6)					
	and the state (6)					
	uniqueID readout command(7-8)			-	/	_
			-	-	(6)	12
	0	_	-	-	_	
reed out						
(7)	probe signal and out commend(7)					
	adjacentib readout command(1)		_	-	Н	_
	(6)	-	\vdash	-	(7)	
read out						
(3),(6)	adjacent[D readout command(2)					
			=	-	-	
read out						
(5)	adjacentID readout commund(3)					
	(1)	_	-			
read out	adjacento					
(1)	adjaceutID readout command(5)		L			
					-	-
read out	(1)					
(2) (7)	adjacently rescort command(6)					
		_	_,			
read out	())			ΙĪ		
(1)	adjacentID readout command(?)					
		-	-		L	L
			_	-		-
read out	(0)					
(5)			1			